


Dwyer**SERIES 636D**

FIXED RANGE DIFFERENTIAL PRESSURE TRANSMITTER

Explosion-Proof, 0.5% Accuracy

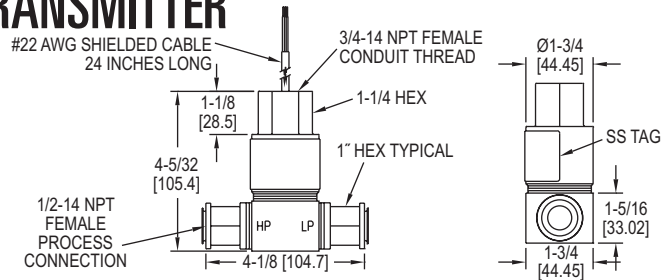

Series 636D Fixed Range Differential Pressure Transmitter can be used for measuring pressures of liquids, gases & vapors. All available ranges have an excellent 0.5% FS accuracy with a 4-20 mA Output standard or optional 1-5 VDC output. The NEMA 4 housing is an all 316 welded construction that is designed to withstand the harshest environmental conditions. With all 316L wetted materials, this transmitter is compatible with most media. These units are CSA approved explosion-proof for use in the specified hazardous locations and meet NACE standards for off-shore applications.

FEATURES/BENEFITS

- NEMA 4X rated enclosure provides protection in harsh environments permitting outdoor monitoring or in areas where dust and particulate matter exists
- Explosion-proof device for use in hazardous areas
- Versatile, high-accuracy device for liquid or gas supports designs requiring more precise measurements in support of application

APPLICATIONS

- Pump differential pressure
- Critical process monitoring
- Off shore applications

MODEL CHART			
Model 4 to 20 mA Out	Range	Model 1 to 5 VDC Out	Range
636D-0	0 to 6 psid	636D-0-LP	0 to 6 psid
636D-1	0 to 15 psid	636D-1-LP	0 to 15 psid
636D-2	0 to 30 psid	636D-2-LP	0 to 30 psid
636D-3	0 to 60 psid	636D-3-LP	0 to 60 psid
636D-4	0 to 100 psid	636D-4-LP	0 to 100 psid
636D-5	0 to 150 psid	636D-5-LP	0 to 150 psid
636D-6	0 to 200 psid	636D-6-LP	0 to 200 psid
636D-7	0 to 300 psid	636D-7-LP	0 to 300 psid
636D-8	0 to 500 psid	636D-8-LP	0 to 500 psid

SPECIFICATIONS

Service: Compatible gases, liquids, or vapors.

Wetted Materials: Types 316L SS.

Accuracy: BFSL: $\pm 0.5\%$ FS (includes linearity, hysteresis, and repeatability).

Stability: ± 1.0 FS/yr.

Pressure Limits: 3 x FS differential pressure; Burst: 2500 psig.

Temperature Limits: Ambient operating:

-40 to 140°F (-40 to 60°C); Process

interface: -40 to 212°F (-40 to 100°C);

Storage: -40 to 212°F (-40 to 100°C).

Compensated Temperature Range: -20

to 160°F (-29 to 71°C).

Thermal Effect: $\pm 2\%$ FS/50°F

(reference to 77°F).

Power Requirements: 12-30 VDC

for 4-20 mA outputs; 8-14 VDC for 1-5

VDC outputs, both with reverse polarity

protection.

Output Signal: 4-20 mA DC or 1-5 VDC.

Zero and Span Adjustment: Fixed.

Response Time: 20 ms.

Loop Resistance: 900 Ω max @ 30

VDC for current outputs. For voltage

outputs, minimum lead resistance 50k

ohms.

Current Consumption: 4-20 mA for

current output models; 3 mA for voltage

output models.

Electrical Connections: 2 ft, 22 AWG

cable; 3/4" female NPT conduit.

Process Connections: Two 1/2" female

NPT.

Enclosure Rating: NEMA 4 (IP56).

Mounting Orientation: ± 0.05 psi/90°

rotation from horizontal.

Weight: 1.8 lb (0.82 kg).

Agency Approvals: CSA approved explosion-proof for Class I, Division 1, Groups B, C, and D; Class II, Groups E, F, and G; Class III.

OPTIONS

Use order code:	Description
NISTCAL-PT1	NIST traceable calibration certificate

**PRESSURE**

Diff