


# FLOTECT® MINI-SIZE FLOW SWITCH

Proof of Flow or No Flow in 1/2 to 2" Pipe, Cost Effective, Leak Proof Body, Weatherproof

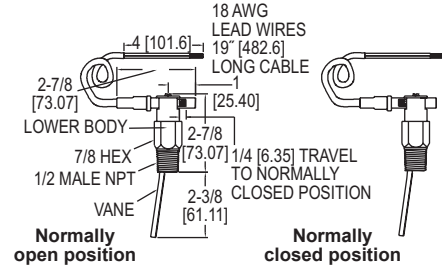

The **Series V10 FloTECT® Mini-Size Flow Switch** is designed to provide inexpensive, reliable monitoring of the presence or absence of flow in a system. This series is available for field installation in pipelines from 1/2 to 2" diameter and available in brass or 303 SS body.

## FEATURES/BENEFITS

- Magnetically actuated switching design gives superior performance with rugged, hermetically sealed reed switch
- Simple field switch adjustment allows user to toggle between Normally Open (NO) or Normally Closed (NC) with no change in the electrical connection
- Switch housing is located outside the process media, allowing simple switch change-over or maintenance without interruption of process flow
- Full size, field trimmable stainless steel vane provided with removable template calibrated for brass or ductile iron reducing tees with forged steel straight tee/bushing combinations

## APPLICATIONS

- Proving flow in boilers, hot water heaters, and chillers
- Protects pumps, motors and other equipment against low or no flow
- Automatically starts auxiliary pumps and engines

APPROXIMATE ACTUATION/DEACTUATION FLOW RATES FOR COLD WATER; GPM (LPM)				APPROXIMATE ACTUATION/DEACTUATION FLOW RATES FOR AIR; SCFM (LPM)			
Pipe Size	Trim	N.O.	N.C.	Pipe Size	Trim	N.O.	N.C.
1/2"	L	2.6/2.3 (9.8/8.7)	2.6/2.5 (9.8/9.5)	1/2"	L	10.3/8.8 (291.7/250)	10.2/9.2 (288/260)
3/4"	J	3.1/2.7 (11.7/10.2)	3.1/2.8 (11.7/10.6)	3/4"	J	13/11.6 (368.3/328)	12.9/11.6 (365/328)
1"	H	4.8/4.5 (18.2/17)	4.8/4.4 (18.2/16.7)	1"	H	19.2/17.6 (543.3/498)	18.9/17.6 (535/498)
1-1/4"	E	6.2/5.6 (23.5/21.2)	6.1/5.6 (23.1/21.2)	1-1/4"	E	24.8/22.2 (701.7/628)	24.5/22.5 (693/637)
1-1/2"	C	8.2/7.7 (31/29.1)	8.2/7.7 (31/29.1)	1-1/2"	C	33.4/31.2 (946.7/883)	33/30.6 (935/867)
2"	Full	9.5/9.1 (36/34.4)	9.5/9 (36/34.1)	2"	Full	50.2/48.4 (1422/1370)	50.2/47.7 (1422/1352)

## SPECIFICATIONS

**Service:** Compatible gases or liquids.  
**Wetted Materials:** Vane: 301 SS; Body: Brass or 303 SS; Pin and magnet: Ceramic 8.  
**Temperature Limit:** 200°F (93°C).  
**Pressure Limit:** Brass body: 1000 psig (69 bar); 303 SS body: 2000 psig (138 bar).  
**Enclosure Rating:** Weatherproof, meets NEMA 4X (IP66).  
**Switch Type:** SPST hermetically sealed reed switch. Field adjustable for normally open or normally closed.  
**Electrical Rating:** 0.5 A @ 120 VAC; 1.5 A @ 24 VDC res.; 0.001 A @ 200 VDC res.

**Electrical Connections:** 18 AWG, 19" (483 mm) long, PVC jacket. Rated 221°F (105°C).  
**Process Connection:** 1/2" male NPT or 1/2" male BSPT.  
**Mounting Orientation:** Switch can be installed in any position but the actuation/deactuation flow rates are based on horizontal pipe runs and are nominal values.  
**Set Point Adjustment:** Vane is trimmable.  
**Weight:** 5.5 oz (0.16 kg).  
**Agency Approvals:** CE, CSA, UR.  
**Switch Enclosure:** Nylon.

## MODEL CHART

Model	Body Material	Connection Type	Switch Configuration
V10	Brass	NPT	Normally open or closed
V10SS	303 SS	NPT	Normally open or closed
V10-BSPT	Brass	BSPT	Normally open or closed
V10SS-BSPT	303 SS	BSPT	Normally open or closed

USA: California Proposition 65

⚠ WARNING: Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)